

PLCC Lightbar Series Amber light FPC Datasheet

Product description :

- 24V constant voltage strip (SELV)
- Ideal for application on aluminum extrusions but also for various decorative lighting applications such as cove lighting, facade accent lighting etc.

Features and benefits :

- Small color tolerance
- Amber light, color temperature 1800K
- Self-adhesive 3M tape at the backside for simple mounting on different surfaces
- 3-year guarantee

Typical Applications :

- Lighting of Art Museum Exhibits
- Architectural decorative

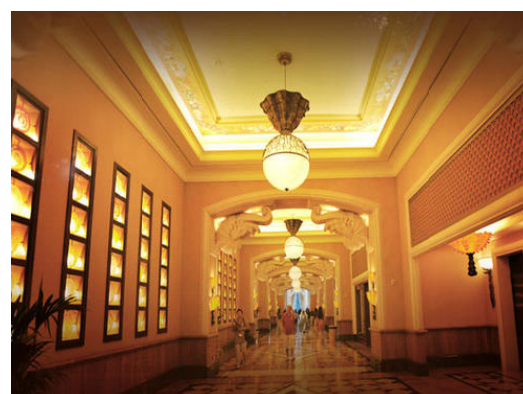
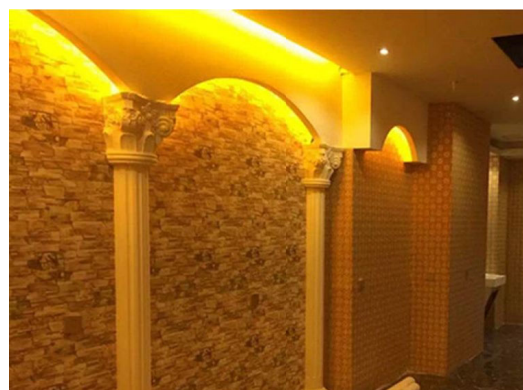


Table of Contents

General Information	3
Technical data	3
Product Dimensions	4
Electric-Optical Characteristics.....	4
Product Packaging Information	5
Precaution for Use.....	6
Environmental Compliance	6
Application Notes.....	6
Revision History.....	7
About Edison Opto	7

General Information

Ordering Code Format

6

X1

LBR1

X2

xx

X3

x

X4

E0

X5

S

X6

xxx

X7

xx

X8

X1
Item

X2
Series

X3
Emitting Color

X4
Driver

X5
Length

6

Module

LBR1

FPC

AX

Amber

J

CV 24V

E0

5M

X6
Emitter

X7
Number of LEDs(M)

X8
SerialNo.

S

2835

120

120pcs

xx


--

Technical data

Parameter	Value	Units
Beam characteristic	120	°C
Ambient temperature range	-25~ +45	°C
Tp rated	65	°C
Tc	75	°C
Type of protection	IP20	
Color Temperature	1800	K
Number of connection	5	M
Risk group(EN62778)	1	
Classification acc. to	IEC62031	
	IEC62778	
	IEC62717	
	IEC61000-4-2	

Product Dimensions

2835-120LED/M Series Dimensions (CV 24V IP20)

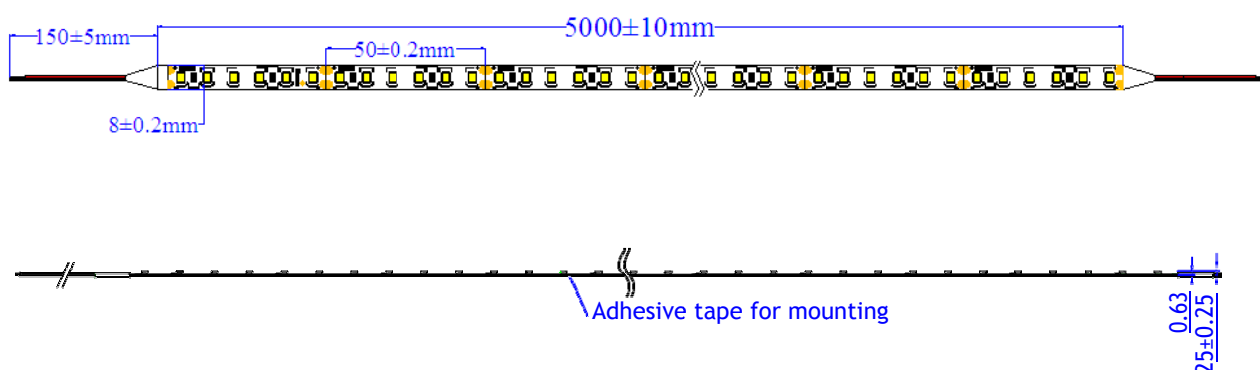

Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.20 mm

Electric-Optical Characteristics

2835-24V-120LEDS/M


Order code	CCT (K)	Voltage (CV)	Luminous flux (lm/M)	Efficacy (lm/W)	Power (W/M)
6LBR1AXJE0S12001	1800	24	860	90	9.6

Notes:

1. The Maximum and minimum lumen flux are based on $\pm 10\%$ of the typical rate.
2. The Maximum and minimum Power are based on $\pm 10\%$ of the typical rate.

Product Packaging Information

Type	Anti-static bag size(mm)	Anti-static bags/ inner box(pcs)	Outside Carton size(mm)	GW±5% (kg)
2835-24v-120LED/M	250x25	10	360x270x270	7.3

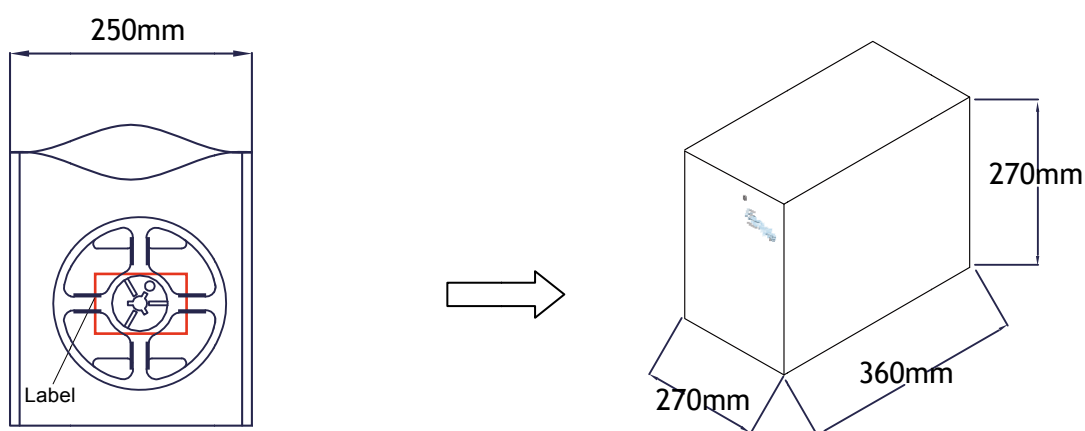

EX:



Label information

Part NO. : Order code

Color : Color(Emitter BIN color)

Quantity : The number of packing

Lot NO. : Date code

Precaution for Use

1. DO NOT use the products with materials has Sulfur.
2. DO NOT assemble in humid environment or the conditions of containing oxidizing gas such as C1, H₂S, NH₃, SO₂, NO_X, etc.
3. DONOT add or change wires while the circuit of Module is active. Long time exposure to sunlight or UV should be avoided.
4. DONOT press the product; even a slight pressure may damage the product. The environments such as high temperatures, high humidity or direct expose to sunlight should be avoided since the product is sensitive to these conditions.
5. Installation of LED modules (with power supplies) needs to be made with regard to all applicable and safety standards. Only qualified personnel should be allowed to perform installations.
6. Assembly must not damage or destroy conducting paths on the circuit board.
7. Please ensure that the power supply is of adequate power to operate the total load.
8. The maximum run length from any power feed should be limited to 5000 mm

Environmental Compliance

PLCC lightbar FPC series are compliant to the Restriction of Hazardous Substances Directive or RoHS. The restricted materials including lead, mercury cadmium hexavalent chromium, polybrominated biphenyls (PBB) and polybrominated diphenyl ether (PBDE) are not used in PLCC lightbar FPC series to provide an environmentally friendly product to the customers.

Application Notes

PLCC Lightbar series are available in red, yellow, green, blue, white, neutral white and warm white for application such as under-cabinet lighting, cove lighting and wall washing. Moreover, additional fine-tuned high color rendering index (CRI) version of white, neutral white and warm white all make PLCC Lightbar the ideal lighting choice for vividly building or decoration products, presenting the products outline.

Revision History

Versions	Description	Release Date
1.0	Establish order code information	2022/01/05

About Edison Opto

Edison Opto is a leading manufacturer of high power LED and a solution provider experienced in LDMS. LDMS is an integrated program derived from the four essential technologies in LED lighting applications- Thermal Management, Electrical Scheme, Mechanical Refinement, Optical Optimization, to provide customer with various LED components and modules. More Information about the company and our products can be found at www.edison-opto.com

Copyright©2020 Edison Opto. All rights reserved. No part of publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photo copy, recording or any other information storage and retrieval system, without prior permission in writing from the publisher. The information in this publication are subject to change without notice.

www.edison-opto.com

For general assistance please contact:
service@edison-opto.com.tw

For technical assistance please contact:
LED.Detective@edison-opto.com.tw